


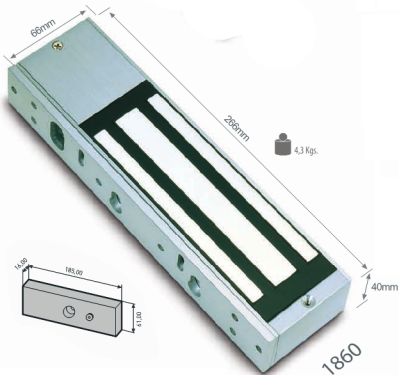

SOBREPONER | RIM

EN APPLIQUE/ AUFSETZ-HAFTMAGNETE



1860

Resistencia: 500 Kgs. Led. Detector presencia
Led + relé de contacto. y estado puerta


Strength: 500 Kgs. Led. Lock and
Contact Relay. door sensor

Resistance: 500 Kgs. Led. Contact de porte
Relais de contacte. et signal avec effet Hall

ACCESORIOS DE MONTAJE / INSTALLATION KIT



U- 1860



Accesorios para montaje en puertas de cristal de 9 a 15 mm
Accessory for assembly glass door from 9 to 15 mm
Accessoire pour montage porte de verre de 9 à 15mm
Montagezubehör für Glastüren von 9 to 15 mm Glasstärke

 12V / 24V DC

Consumo
Consumption

500mA/12VDC
250mA/24VDC