

Roda em V - 1 Rolamento  
C/Suporte Soldar

| Ø   | A  | B  | Carga* |
|-----|----|----|--------|
| 50  | 17 | 12 | 300    |
| 60  | 17 | 12 | 300    |
| 80  | 20 | 16 | 400    |
| 100 | 20 | 16 | 400    |
| 120 | 20 | 16 | 600    |
| 140 | 20 | 16 | 600    |


Roda em V C/20 - 1 Rolamento  
C/Suporte Soldar

| Ø   | A  | B  | Carga* |
|-----|----|----|--------|
| 60  | 20 | 16 | 300    |
| 60  | 25 | 20 | 300    |
| 80  | 25 | 20 | 400    |
| 100 | 25 | 20 | 400    |
| 120 | 25 | 20 | 600    |
| 140 | 25 | 20 | 600    |

Roda em V - 2 Rolamentos  
C/Suporte Soldar

| Ø   | A  | B  | Carga* |
|-----|----|----|--------|
| 60  | 25 | 20 |        |
| 80  | 25 | 20 |        |
| 100 | 25 | 20 |        |
| 120 | 25 | 20 |        |
| 140 | 20 | 20 |        |

\* - KG

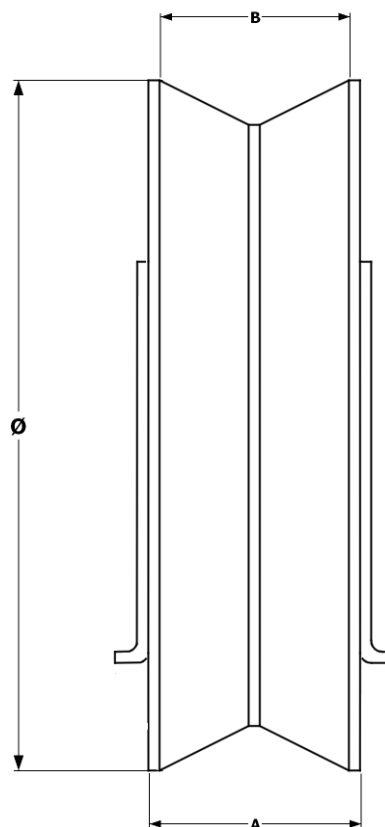

Roda Canal V  
C/Sup. Soldar

Roda com suporte soldar, canal em V, com 1 ou 2 rolamentos.