



**Technical features:**

- Aluminium alloy monoblock body.
- Steel arm
- Special high tensile steel spring immersed in high grade oil.
- Regulating valve with thermostatic device

**Reliability**

- Over 500 000 opening cycles according to UNI EN 1154 standard requirements.

**Supplied as standard:**

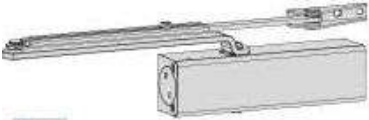



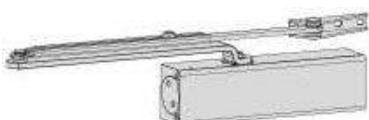

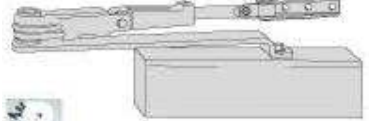

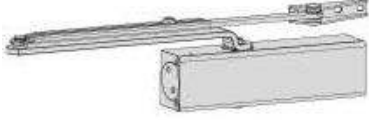



- Template and fixing instructions
- Fixing screws

**Adjustments:**

- Closing Force
- Speed of closing
- Strength of final slam

**CERTIFICATION**

- Where shown the CE mark granted by ICIM according to the directive 89/106/CEE.
- Where shown the voluntary certificate issued by a certifying body according to the UNI EN 1154 standard.

	Closing force EN1154	Max. door width	Max. door weight	Code	Size	Finish	Price
 <p><b>MULTISTRENGTH</b></p> <ul style="list-style-type: none"> <li>• No hold-open device</li> <li>• CE Mark</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4	850-1100	40-80	<b>D1510</b>	03	97	
 <p><b>MULTISTRENGTH</b></p> <ul style="list-style-type: none"> <li>• With hold-open device</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4	850-1100	40-80	<b>D1511</b>	03	97	
 <p><b>ADJUSTABLE STRENGTH</b></p> <ul style="list-style-type: none"> <li>• No hold-open device</li> <li>• Back check</li> <li>• CE Mark</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4	850-1400	40-120	<b>D1610</b>	03	97	
 <p><b>ADJUSTABLE STRENGTH</b></p> <ul style="list-style-type: none"> <li>• With hold-open device</li> <li>• Back check</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4	850-1400	40-120	<b>D1611</b>	03	97	
 <p><b>ADJUSTABLE STRENGTH</b></p> <ul style="list-style-type: none"> <li>• No hold-open device</li> <li>• Back check</li> <li>• CE Mark</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4,5,6	850-1400	40-120	<b>D1610</b>	05	97	
 <p><b>ADJUSTABLE STRENGTH</b></p> <ul style="list-style-type: none"> <li>• With hold-open device</li> <li>• Voluntary Certificate ..according to EN1154</li> </ul> 	2,3,4,5,6	850-1400	40-120	<b>D1611</b>	05	97	